

陶土

TERRACOTTA

W ENERGY

DESIGN SENSE
COLLECTION




TERRACOTTA SENSE COLLECTION

产品汇总



CODE
TYJZ520X-11

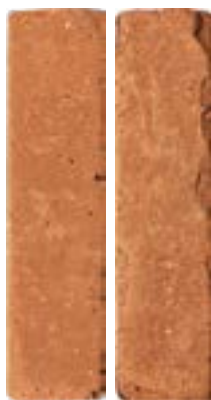

CODE
TYJZ520X-25



CODE
WF571



CODE
WF579



CODE
BV-235/01



CODE
SFF-56/EVG-02



CODE
SFF-56/EVG-03





TERRACOTTA SENSE COLLECTION

产品信息 Product information



CODE : TYJZ520X-25

THICKNESS : 25mm

SIZE : 50X200mm





TERRACOTTA SENSE COLLECTION

产品信息 Product information



CODE : TYJZ520X-11

THICKNESS : 11mm


SIZE : 50X200mm





TERRACOTTA SENSE COLLECTION

产品信息 Product information

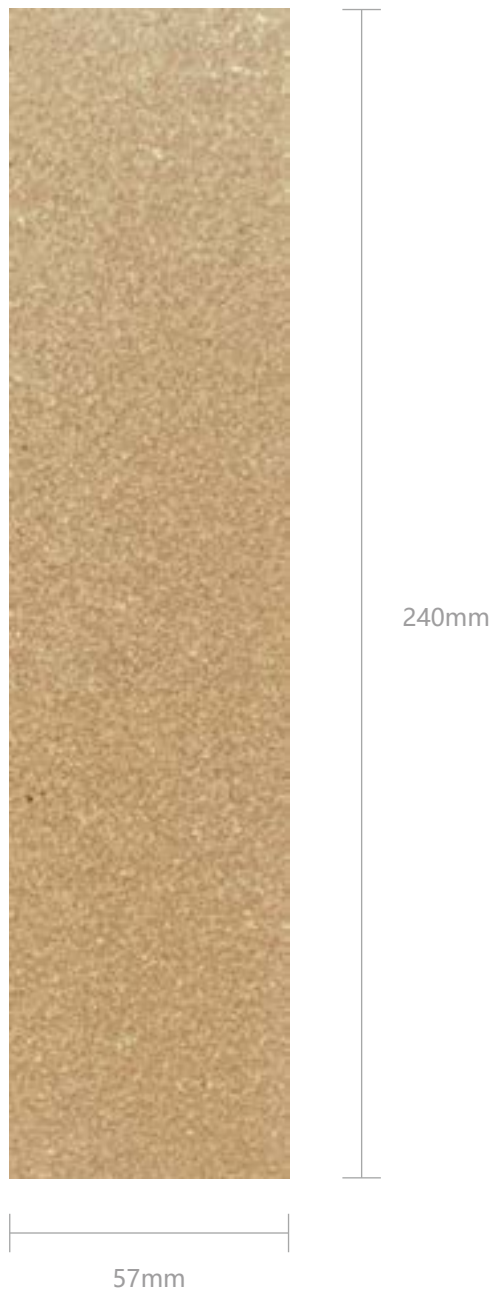

CODE : WF571
THICKNESS : 14mm
SIZE : 57X240mm





TERRACOTTA SENSE COLLECTION

产品信息 Product information



CODE : WF579
THICKNESS : 14mm
SIZE : 57X240mm





TERRACOTTA SENSE COLLECTION

产品信息 Product information



CODE : BV-235/01
THICKNESS : 8.5mm
SIZE : 55x235mm


PACKING INFORMATION
PSC/ m² : 96 psc
PSC/ BOX : 96 psc





TERRACOTTA SENSE COLLECTION

产品信息 Product information

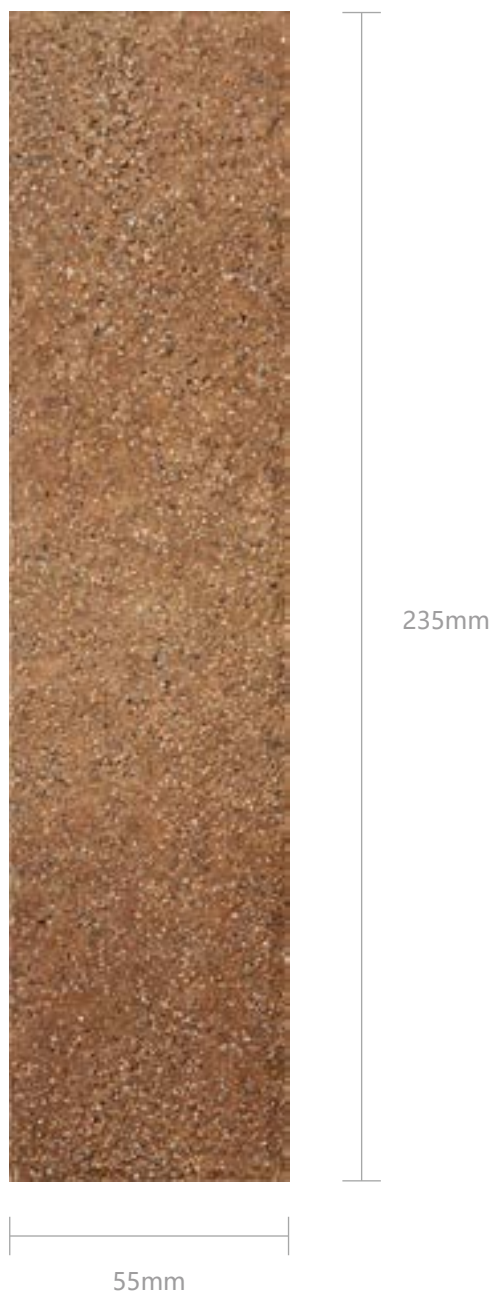

CODE : SFF-56/EVG-02

THICKNESS : 8.5mm

SIZE : 55x235mm

PACKING INFORMATION

PSC/ m² : 108 psc

PSC/ BOX : 108 psc




ENERGY
ENERGY
ENERGY





TERRACOTTA SENSE COLLECTION

产品信息 Product information

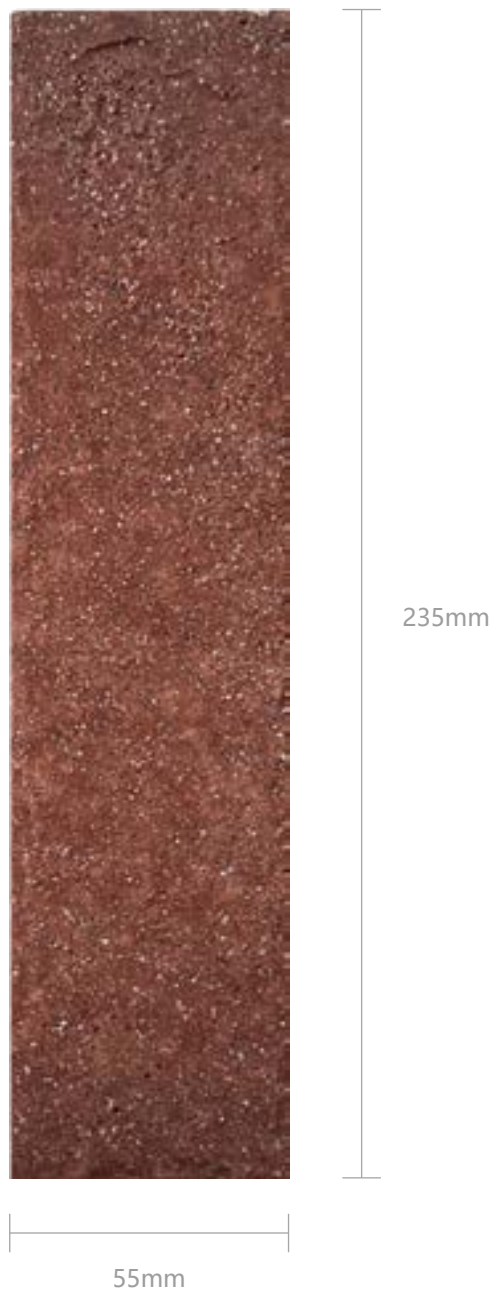

CODE : SFF-56/EVG-03

THICKNESS : 8.5mm

SIZE : 55x235mm

PACKING INFORMATION

PSC/ m² : 108 psc

PSC/ BOX : 108 psc

TERRACOTTA SENSE COLLECTION

Product Description

SERIES	陶土 Terracotta
SIZE	For detailed information, please refer to the product Information page
GLAZE	Matta
MATERIAL	Terracotta
WATER ABSORPTION	> 10
SURFACE	Full-body
ANTI-FOULING	√
ANTI-SLIP	√
SCRATCH RESISTANT	√
SEAM	2-3mm
PASTE MATERIAL	Tile Adhesive/Cement
PAVING SUGGESTIONS	When using cement, soak the tiles in water for 20 minutes. When using tile adhesive, there's no need to soak the tiles.
SEALANT	Apply epoxy grout three days later
SUITABLE	Floor Tile / Wall Tile / Backsplash / Bathroom / Bedroom / Kitchen